


## IDE to CF Adapter Card with a PCI Bracket

StarTech ID: PLATEIDE2CF

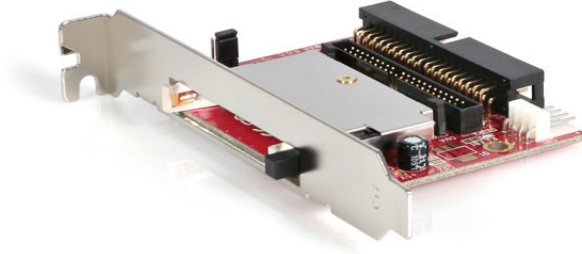

This Compact Flash to IDE adapter connects to any standard 40 pin or 44 pin IDE connection on a desktop computer, allowing a Compact Flash card to be used as bootable storage in place of an IDE hard drive!

A Do-it-yourself SSD solution, the CF to IDE adapter can be powered by a 4-pin floppy connector or through a 44-pin IDE port, and can be mounted to the computer rear panel using the included PCI bracket - allowing Compact Flash, Compact Flash 2, or IBM MicroDrive media to be inserted into the CF slot.

The adapter function is completely transparent to the operating system, and jumper settings are provided allowing you to designate the installed MicroDrive or CF cards to act as a Master or Slave drive.

## Features

- For any computer case , mini computer, embedded system, iPC and Rackmount case
- PCI Mounting bracket
- Powered by a SP4 connector or 44 pin IDE connector
- Push bottom ejector on board
- Supports 40 pin & 44 pin IDE connectors
- Supports CompactFlash™ cards (Type I & II) or a IBM Microdrive™
- Supports jumper for master and slave setting
- The CF card can be the primary bootable device containing the OS and application
- Transparent to the operating system and does not require any drivers

## Technical Specifications

- Warranty: Lifetime warranty
- Product Height: 6.22 in [158 mm]
- Product Length: 8.58 in [218 mm]
- Carton Quantity: 40
- Shipping (Package) Weight: 0.38 lb [0.17 kg]
- Product Weight: 2.12 oz [60 g]
- Product Width: 1.77 in [45 mm]

