

SATADOCK525


5.25" Bay Mounted 2.5" and 3.5" SATA Hard Drive Dock

StarTech.com 
Making hard-to-find easy!®

Installation Guide


Packaging Contents

- 1 x SATADOCK525 docking station
- 2 x SATA Data Cables
- 2 x SATA Power Adapter Cables
- 4 x Mounting Screws
- 1 x Installation Guide

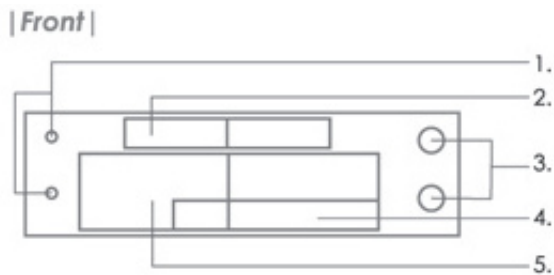

1. Power / Access LED 2. Upper 2.5" HDD bay
3. Power on/off Switch 4. 2.5" HDD bay
5. 3.5" HDD bay

|BACK|

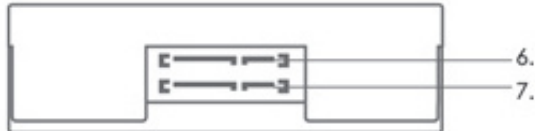

6. Upper 2.5" HDD SATA connector
7. 3.5" HDD SATA connector

Hardware Installation

1. Install the SATADOCK525 docking station into an available 5.25" external bay in your computer case. Follow the directions for installing such a device per the computer's user manual. 4 mounting screws are provided for cases that require it.
2. Once the docking station is securely mounted, connect the SATA data and power cables. Both sets of connectors on the rear of the docking station must be connected, for both hard drive slots to work. An LP4

Warranty Information

This product is backed by a one year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability


In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

to SATA power cable is provided, but if your computer power supply has an SATA power connector, you can connect that directly to the docking station.

How to Use

Before inserting a hard drive into the drive slots, make sure that power button is set to OFF. Press the Power switch to the OFF position, before removing the hard drive from the drive slot.

Hot-swap capabilities are a function of the SATA controller that the dock is connected to. If hot-swappable, then the hard drive can be removed and replaced without the need to restart the operating system.

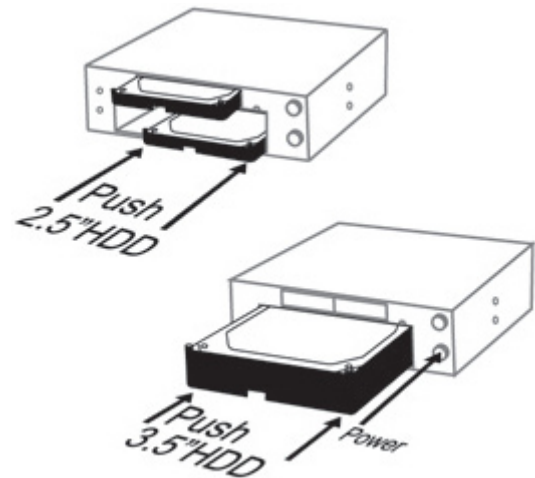

Specifications

Bus Interface	SATA rev 2.0
Connectors	2 x SATA data (7-pin) 2 x SATA power (15-pin)
LED	2 x Power/Activity
Dimensions	145.0mm x 108.0mm x 42.0mm
Weight	240g (8.47oz)