

USB 3.0 / eSATA 8-Bay Hot-Swap 2.5/3.5" SATA III Hard Drive Enclosure with UASP – 8-Bay SATA 6 Gbps Enclosure for HDD / SSD

Product ID: S358BU33ERM



The S358BU33ERM 8-bay removable hard drive enclosure lets you access eight individual 2.5" or 3.5" hard drives simultaneously using a single eSATA or USB port.

For fast performance and efficient data transfers when connected through eSATA, the HDD enclosure supports full SATA III transfer speeds -- up to 6 Gbps. For universal compatibility, the enclosure can be connected through USB 3.0 with transfer speeds up to 5 Gbps plus support for UASP, which supports performance up to 70% faster than conventional USB 3.0 when paired with a UASP-enabled host controller to utilize the full potential of your SATA III hard drives. See our UASP testing results below for further details.

The HDD enclosure supports the fastest drive technologies including SATA III (6 Gbps), hybrid drives and solid state drives (SSD), helping save you time through optimized performance from your external storage devices.

To help protect your drives the HDD/SSD enclosure has a built-in fan that keeps your drives running at optimal temperatures. Plus, the metal drive trays ensure maximum heat dissipation. To ensure compatibility with your computer system, the drive enclosure is OS independent.

Please note that in order to access multiple drives, the enclosure requires that your host device supports port multiplier. For desktop computers without port multiplier capability, StarTech.com offers the [2 Port PCI Express eSATA Controller Card](#) (PEXESATA2).



Improved Performance with UASP

UASP is supported in Windows 8, Mac OSX (10.8 or above), and Linux. In testing, UASP performs with a 70% faster read speed and 40% faster write speed over traditional USB 3.0 at peak performance.

At the same peak in testing UASP also shows an 80% reduction in required processor resources.

Testing results were obtained using an Intel® Ivy Bridge system, a UASP-enabled StarTech.com Enclosure, and a SATA III solid state drive.

The S358BU33ERM is backed by a StarTech.com 2-year warranty and free lifetime technical support.

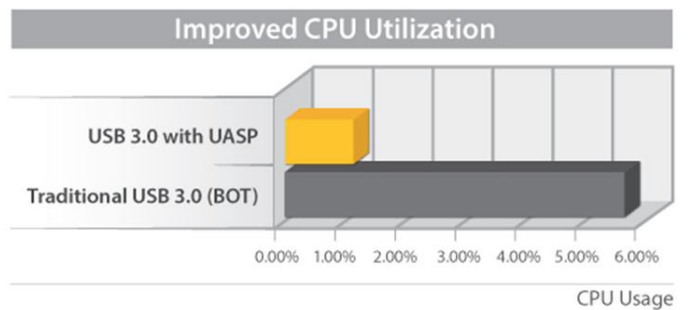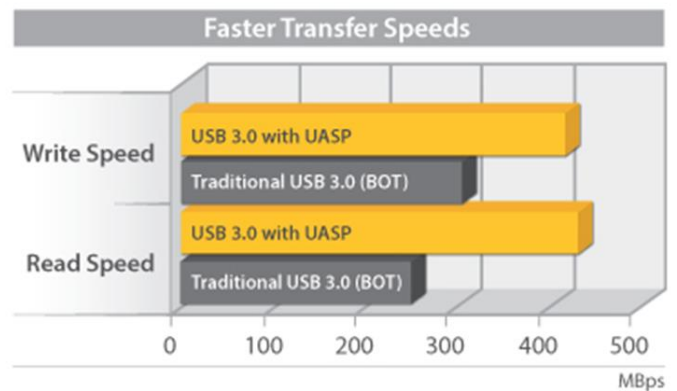

Certifications, Reports and Compatibility



Applications

- Add an 8-bay hot-swap enclosure to a server or workstation computer, for a removable backup solution
- Expand the storage capabilities of a small form factor/embedded system or laptop, with external drives
- Adding external storage capacity for video editing or photo editing stations, making it easier to work with very large file sizes
- Creating additional backup/archive storage
- Turn unused SATA hard drives into additional external data storage

Features

- Supports SATA III (6 Gbps) and UASP for optimal performance
- Supports both 2.5" and 3.5" form factor hard drives (HDD) and solid state drives (SSD)
- eSATA or USB host connection
- Eight individual drive bays with solid aluminum drive trays
- Access multiple drives simultaneously - the host device must support port multiplier
- Built-in cooling fan
- Compatible with USB 3.0 / 2.0 / 1.1 (5 Gbps / 480 Mbps / 1.5 Mbps)
- Compatible with SATA revision I/II/III (1.5/3.0/6.0 Gbps) drives

| | | |
|----------------------------|----------------------------------|--|
| Hardware | Warranty | 2 Years |
| | Bus Type | USB 3.0 & eSATA |
| | Chipset ID | JMicron - JMB575M JMicron - JMS567 |
| | Compatible Drive Types | SATA |
| | Drive Installation | Removable |
| | Drive Size | 2.5in & 3.5in |
| | Fan Bearing Type | Sleeve Bearing |
| | Fan(s) | Yes |
| | Fans | 1 - 120 mm |
| | Interface | USB 3.0 & eSATA |
| | Number of 2.5 inch bays | 8 |
| | Number of Drives | 8 |
| | Number of internal 3.5 inch bays | 8 |
| | Performance | Air Flow Rate |
| General Specifications | | Supports 2.5in Solid State Drives (SSD) and Hard Drives (HDD) using a 2.5in to 3.5in drive adapter such as 25SAT35HDD and 25SATSAS35 |
| Hot Swap Capability | | Yes |
| Max Drive Capacity | | Currently tested with up to 6TB 7200 RPM hard drives |
| Maximum Data Transfer Rate | | 6 Gbps |
| MTBF | | 30,000 Hours |
| Noise Level | | 20.4 dBA |
| Port Multiplier | | Yes |
| RAID | | No |
| Type and Rate | | USB 3.0 - 5 Gbit/s eSATA (6 Gbps) |
| UASP Support | Yes | |
| Connector(s) | Drive Connectors | 8 - SATA Data & Power Combo (7+15 pin) Receptacle |
| | Host Connectors | 1 - USB Type-B (9 pin) USB 3.0 Female 1 - eSATA (7 pin, Data) Female |
| | | |
| Software | OS Compatibility | OS independent; No software or drivers required |

| | | |
|-------------------------------------|-------------------------------|--|
| Special Notes / Requirements | System and Cable Requirements | Computer system with available USB port or eSATA port. The enclosure requires that the host device supports port multiplier to access multiple drives simultaneously. |
| Indicators | LED Indicators | 8 - Drive Activity / Interface LED 1 - Power LED 1 - HDD Ready LED 1 - USB / eSATA LED |
| Power | Input Current | 6 A |
| | Input Voltage | 100 ~ 240 AC |
| | Power Consumption (In Watts) | 120 |
| | Power Source | AC Adapter Included |
| Environmental | Humidity | 10% ~ 90% non-condensing |
| | Operating Temperature | 5°C to 55°C (41°F to 131°F) |
| | Storage Temperature | -40°C to 70°C (-40°F to 158°F) |
| Physical Characteristics | Color | Black |
| | Product Height | 13.4 in [340 mm] |
| | Product Length | 13.8 in [350 mm] |
| | Product Weight | 303.9 oz [8610 g] |
| | Product Width | 5.9 in [150 mm] |
| Packaging Information | Shipping (Package) Weight | 19 lb [8.6 kg] |
| What's in the Box | Included in Package | 1 - USB 3.0 / eSATA SSD/HDD Enclosure 8 - 2.5/3.5" drive trays (preinstalled) 1 - SATA to eSATA full profile bracket 1 - eSATA cable 1 - USB 3.0 cable 1 - 2.5/3.5" drive installation screw kit 3 - Power cables (NA/UK/EU) 1 - Instruction manual |

Product appearance and specifications are subject to change without notice.