

# Removable Bay SATA Drive Enclosure

InfoSafe 5.25" Bay Removable 3.5" SATA Drive Enclosure

SAT3510U2REM

Instruction Manual



Actual product may vary from photo

**StarTech.com**   
Making hard-to-find easy!

## **FCC Compliance Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## **Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols**

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

# Table of Contents

<b>Introduction</b> .....	<b>1</b>
Features .....	1
System Requirements .....	1
Package Contents .....	1
<b>Installation</b> .....	<b>2</b>
Installing the Drive in the Enclosure .....	2
Installing the Drive Bay Frame in the Computer .....	4
<b>Operation</b> .....	<b>5</b>
Disconnecting the Enclosure from the Host Computer .....	5
<b>Specifications</b> .....	<b>6</b>
<b>Technical Support</b> .....	<b>6</b>

## Introduction

Thank you for purchasing a StarTech.com 5.25" Bay Removable 3.5" SATA Drive Enclosure. Perfect for large volume data offloads, external storage, or a simple way to swap storage between your notebook and desktop computers, SAT3510U2REM is the ideal addition to any storage environment.

### Features

- Compatible with both PC and Mac systems
- LED displays power and activity
- Transfer speeds up to 3Gbps with SATA II and 480Mbps with USB 2.0

### System requirements:

- Internal: 1x 5.25" bay & SATA support
- External: An available USB port

### Package contents:

*This package should contain:*

- 1 X Drive Bay Frame
- 1 X Drive Enclosure
- 1 X Mounting Hardware
- 1 X Power Adapter
- 1 X Power Cord
- 1 X SATA Data Cable
- 1 X USB Cable


# Installation

## Installing the Drive in the Enclosure

1. Gently press the left side of the retaining arm to release the lock mechanism, then pull the door open to release the enclosure from the Drive Bay Frame.




2. Once the retaining arm is open, pull the drive enclosure from the Drive Bay Frame:

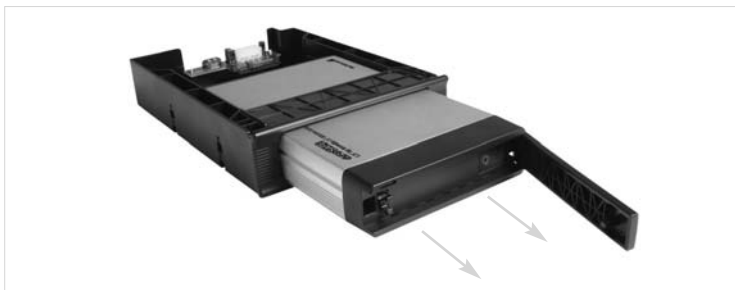

3. With the enclosure fully removed from the Drive Bay Frame, remove the screws on the rear panel of the drive enclosure, and detach the rear panel from the rest of the enclosure.




4. Connect the 3.5" SATA hard drive to the connector provided by the detached rear panel, ensuring the drive is securely fastened:

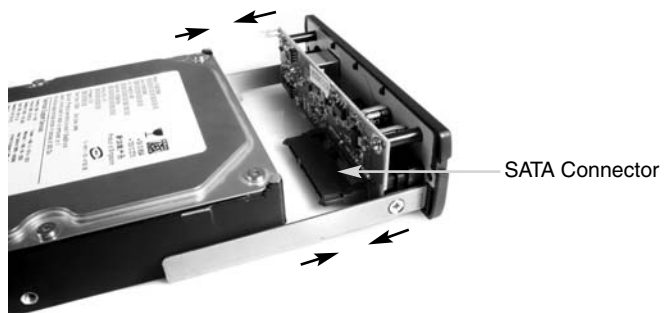

5. Fasten the hard drive to the rear panel of the enclosure, by securing it to the metal brackets provided.



6. Fasten the Tension Clips (provided) to each side of the drive as shown below:

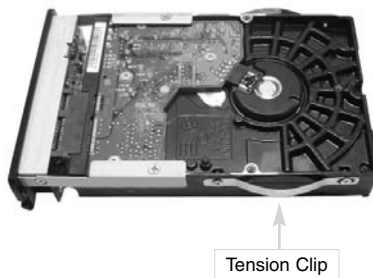

7. Once the drive has been fastened to the rear panel and the Tension Clips have been attached to the sides of the drive, replace the panel and drive in the Enclosure and secure the screws removed in step #3.

### Installing the Bay in the Computer




**WARNING:** Be sure that you are properly grounded before opening your computer case or touching any components. StarTech.com recommends that you wear an anti-static strap when installing any computer equipment. If an anti-static strap is unavailable, discharge yourself of any static electricity build-up by touching a large grounded metal surface (such as the computer case) for several seconds.




**WARNING:** Hard drives require careful handling, especially when being transported. If you are not careful with your hard disk, lost data may result. Always handle your hard drive and storage device with caution.

1. Power down the host computer.
2. Insert the Drive Enclosure into the Drive Bay Frame (see steps 1 and 2 on pg. 2), and press the retaining arm back to it's initial position, until it clicks closed.

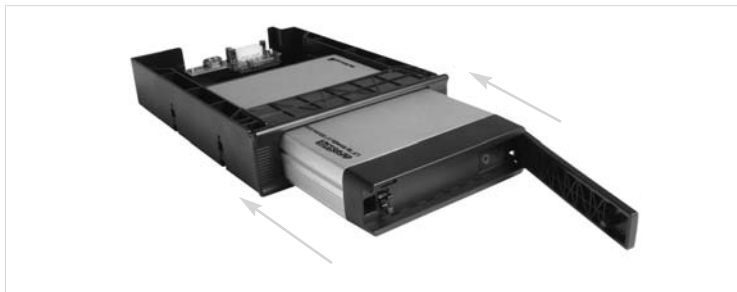

3. Remove the cover of the host computer drive bay slot (5.25") into which you wish to install the Drive Bay Frame and Enclosure, as well as the side panels of the computer case. If you require further instruction on this step, please consult the documentation that accompanied your computer or computer case at the time of purchase.
4. Connect the SATA data connector on the rear panel of the Drive Bay Frame to the motherboard, using the included SATA data cable, then connect the an available LP4 power connector (provided by computer power supply) to the LP4 Power connector on the Drive Bay Frame.

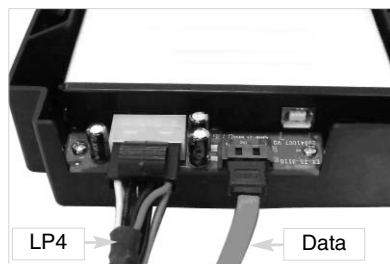

5. Once the Drive Bay has been fastened to the computer case and the necessary connections have been made, replace the side panels of the computer casing (removed in step 2) and power up the computer.

## Operation

Once the Drive Enclosure (with drive installed) has been properly installed, the enclosed drive can be accessed as though it were installed conventionally within the computer case.

If you wish to use the Enclosure as a removable drive, simply remove the Enclosure from the host computer by releasing the retaining arm (see step #1 on pg. 2) and sliding it out from the bay. Once removed, connect it to an available USB 2.0 port on the host computer, using the USB 2.0 cable provided, and connect the included power adapter to the port marked DC5V on the rear panel of the Enclosure.

### **Disconnecting the Enclosure from the Host Computer**

To eliminate lost data or damage to the installed drive, please ensure that you follow the correct procedure for removing storage from the host computer.

#### **When used as a removable hard drive (USB Connection):**

Click on the **Safely Remove Hardware** wizard icon located near the clock in the bottom right corner (typically) of the Windows desktop. You will be prompted to select the USB storage you wish to remove, and click on **Stop**. To avoid losing data from the drive, please wait until a message balloon appears, indicating that “**it is now safe...**” to remove the drive from the computer.



#### **When removing the Enclosure from the host computer (SATA Connection)**

To remove the Enclosure from a SATA connection to the host computer, simply power down the host computer and release the retaining arm..

## Specifications

<b>LED Indicators</b>	1 x Power and Activity
<b>Enclosure Type</b>	Aluminum
<b>Connectors</b>	<b>Drive :</b> 1x SATA Data 7-Pin Female 1x SATA Power 15-Pin Female  <b>Host :</b> 1x SATA Data 7-Pin Male 1x LP4 Male 1x USB B Female (External)
<b>Max. Data Transfer Rate</b>	<b>Internal:</b> 3 Gbps via SATA II (SATA /300) <b>External:</b> 480 Mbps via USB 2.0
<b>OS Support</b>	Windows ME/ 2000 /XP/VISTA, Mac OS 9.x or higher, Linux 2.4.1.0 and above
<b>Supported Drives</b>	3.5" SATA SATA I (150) / SATA II (300) hard drives up-to 1TB in size

### Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit [www.startech.com/support](http://www.startech.com/support) and access our comprehensive selection of online tools, documentation, and downloads.

### Warranty Information

This product is backed by a one-year warranty. In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

## **About StarTech.com**

StarTech.com is “The Professionals’ Source for Hard-to-Find Computer Parts”. Since 1985, we have been providing IT professionals with the quality products they need to complete their solutions. We offer an unmatched selection of computer parts, cables, server management solutions and A/V products and serve a worldwide market through our locations in the United States, Canada, the United Kingdom and Taiwan.

Visit **[www.startech.com](http://www.startech.com)** for complete information about all our products and to access exclusive interactive tools such as the Parts Finder and the KVM Reference Guide. StarTech.com makes it easy to complete almost any IT solution. Find out for yourself why our products lead the industry in performance, support, and value.