

Video Capture Cable

USB 2.0 Video Capture Cable

SVID2USB2

Instruction Manual



Actual product may vary from photo

StarTech.com

The Professionals' Source for Hard-to-Find Computer Parts

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents

| | |
|---|-----------|
| Introduction | 1 |
| Features | 1 |
| Before You Begin | 1 |
| System Requirements | 1 |
| Contents | 1 |
| Installation | 2 |
| Installing the drivers | 2 |
| Installing the GrabBee Multimedia Application | 3 |
| Hardware | 4 |
| GrabBee Multimedia Application operation | 4 |
| Specifications | 7 |
| Troubleshooting | 8 |
| Accessories available from StarTech.com | 9 |
| Technical Support & Warranty Information | 10 |

Introduction

Thank you for purchasing a StarTech.com USB 2.0 Video Capture Card. The ideal solution for portable A/V applications, this product offers real-time MPEG 1, 2 and 4 recording, providing a perfect bridge between your computer and VCR, camcorder or any other S-Video source. Small enough to fit in the palm of your hand, SVID2USB2 integrates seamlessly with notebook and desktop computers.

Features

- Portable form factor for on-the-go applications
- Offers USB 2.0 transfer rates (480Mbps) for high quality video capturing
- Up to 30 fps motion capture capability at resolutions up to 720x480(NTSC) / 720x576(PAL)
- SnapShot function allows you to capture still images
- Brightness, contrast and sharpness controls offer an optimized viewing experience
- Supports NTSC, PAL, and SECAM formats

Before You Begin

System Requirements

- Pentium 4 based or equivalent PC, with an available USB 2.0 port
- 128MB RAM
- Windows 2000 SP3 or above, Windows XP SP1 or above
- Sound card

Contents

This package should contain:

- USB 2.0 Video capture cable
- Installation and Driver CD
- Instruction manual


Installation

Prior to installing this device, please ensure that your computer has an available USB2.0 port, and that your operating system has been updated according to the most recent revisions (Windows XP SP1, Windows 2000 SP3 etc.). Also, please ensure that the USB2.0 host driver is updated according to the most modern version available.

*****Please note: Before connecting SVID2USB2 to your computer, please ensure that the necessary drivers have been installed.**

Installing the drivers

1. Please insert the **Multimedia Installation Kit** CD into your CD or DVD-ROM drive.
2. Locate the folder entitled **Driver**, located in the **GrabBee X + Deluxe** folder on the Driver CD. Double-click on the **Setup.exe** file to launch the InstallShield Wizard. Once this window launches, please click on **Next**:

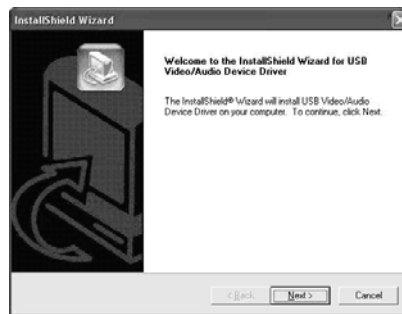


2. The multimedia software will install automatically. Once complete, you will be notified that **Setup has finished installing USB Video/Audio Driver on your computer**. Please click **Finish**:



3. To complete the Setup Wizard installation process, please restart your computer. Once the computer has been rebooted, please insert the USB connector provided by SVID2USB2 into an available USB 2.0 slot on the computer. Windows will then automatically detect the connected device and conclude the necessary software installation.

4. To verify that the installation was successful, locate and right-click on the **My Computer** icon (located on desktop or in Start menu), and select **Manage**. This will launch the **Computer Management** utility. Click on **Device Manager**, and click on the **[+]** symbol located next to **Sound, video and game controllers**, where you will now see two new additions - **USB 2.0 A/V Converter** and **USB EMP Audio Device**:

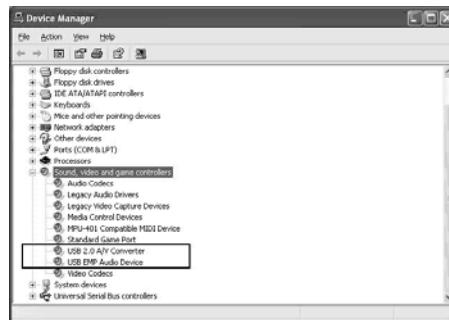


Please note: Although the multimedia application packaged with SVID2USB2 is designed specifically for use with this device, it is not required for use. For information about third party alternatives, please consult your local computer store or computer manufacturer for more information.

Installing the GrabBee Multimedia Application

1. Please insert the **Multimedia Installation Kit** CD into your CD or DVD-ROM drive.
2. Locate the folder entitled **AP Software**, located in the **GrabBee X + Deluxe** folder on the Driver CD. Double-click on the **Setup.exe** file to launch the InstallShield Wizard. Once this window launches, please click on **Next**.
3. The screen that follows will ask you to select the installation destination. Please enter an appropriate path (if it varies from the default), and click **Next**.
4. When the **Windows Media Format 9 Series Runtime Setup** launches, please click **Yes**. To advance, please click **Yes**, when the License agreement is displayed. Once you are notified that installation has completed, please click **OK**.
5. You will then be prompted to install **Windows Media Tools**. Please click **Yes**, and proceed through the installation steps, by clicking **Next** and **Yes** where applicable. To conclude installation, please click on **Finish**.
6. Once the software has been installed, you may be prompted to reboot your computer. Please do so.

SVID2USB2 - Hardware

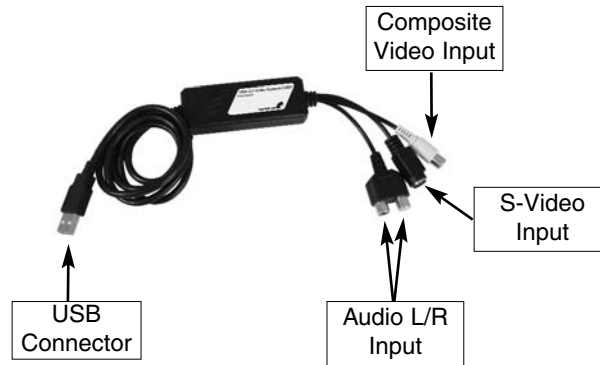

Please note: If you are using Windows 2000, please connect the audio from your external A/V device to the line-in port on your sound card.

In order to launch the Multimedia application, you will first be required to connect the SVID2USB2 Video Capture Cable to your computer. Once the USB connection has been made, you will be able to configure the settings for the device, using the instructions below.

GrabBee Multimedia Application Operation

Following the installation of the **GrabBee** software, you will notice three new icons located on your desktop:




Instruction Manual

To launch the main application, please click on the **GrabBee** icon. Once the application launches, you will see the following:



Right-click on the Video Window to launch the function menu, where you will be able to select video resolution and screen size:

352 x 288
640 x 480
720 x 576
Full Screen
Always On Top

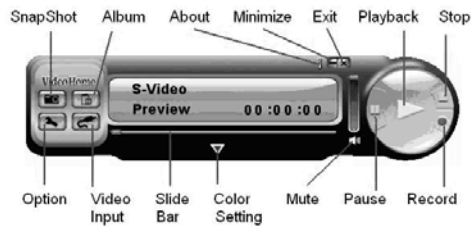

Option


Click on **Option** on the control panel (illustrated above) to launch the following screen:



Under the **General** tab, you will see the following:

- Hard disk space information*
- Snapshot default storage path* - The location to which captured images will be stored.
- Clip default storage path* - The location to which captured video clips will be stored.
- Video Format* - Allows you to choose the video input being used
- Set Recording Time* - Allows you to set the recording length

Under the **Encoder Property** tab:

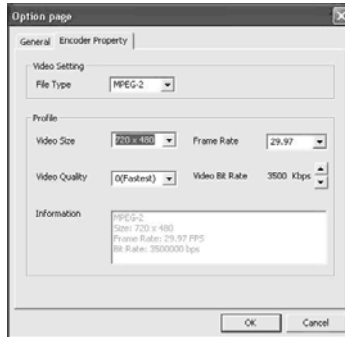

- a) *Video Setting* - Recording file format
- b) *Profile* - Video size, Frame Rate, Video quality, Video Bit Rate setting

Video Input

Allows you to switch between Composite or S-Video input

Slide Bar

Move to any video position during playback

Color Setting

Brightness / Contrast / Hue / Saturation adjustment

Mute

Volume On / Off

Pause

Pause the playback file

Record

When you click this button, video recording will begin. If you click the **Stop** button, a table will be displayed asking you to rename or save the file. The default file name is **MDDHHMMSS**, (i.e. Month, Date, Hour, Minute, Second).

Stop

Stop recording or playback

Playback

Play the recorded file

SnapShot

Image capture resolution will match that of the Video Window (preview window). Clicking on SnapShot will launch the following table:



Album

The Album will display all captured files, including images and video. Please click **Clips** or **Images**, where you will be able to locate each file name, or preview the recorded video.

Full Screen mode

Double-click the left mouse button inside the Video Window (preview window) to switch between full screen and previous screen sizes.

Specifications

| | |
|----------------------------------|---|
| Bus Type | USB |
| Connectors | 1 x S-Video Female Connector 1 x RCA Composite Video Connector 1 x RCA Stereo Audio Connector |
| Regulatory Certifications | FCC, CE, ROHS |

Troubleshooting

The computer does not detect SVID2USB2

- a) Ensure that you have enabled USB 2.0 in the motherboard BIOS setup
- b) Ensure that your system has the latest USB 2.0 drivers installed. For Windows XP, please upgrade to at least Service Pack 1. For Windows 2000, please upgrade to Service Pack 3 or above

Preview Mode only displays a resolution of 320x240

Ensure that SVID2USB2 has been installed in a USB 2.0 port, and that proper USB 2.0 Host drivers are installed. Installing SVID2USB2 in a USB 1.1 port will result in a lower resolution.

Video is unstable during preview and recording

If you are using an Ultra DMA hard drive, please update to the latest IDE ATA/ATAPI controller driver. Some motherboards are bundled with older drivers, as such, it is recommended to use the Windows XP bundled driver

No sound is broadcast during Preview Mode

- 1) In Windows XP, the audio signal will be sent through SVID2USB2

In Windows 2000, the audio will be sent through the sound card's line-in function. In this case, please ensure that your sound card is functional, and updated with the most recent drivers.

- 2) Ensure the volume is turned up enough to hear intended sound.

How can I minimize the number of dropped frames during video capture

- a) For optimum recording performance, try lowering the resolution, as overall performance from this device will be controlled by the performance and capability of your computer.
- b) Try to maximize the amount of free space you have on your hard drive
- c) Disable Power Management in the BIOS
- d) Disable the Power Saving mode on your monitor
- e) Defragment the hard drive
- f) Close all other programs

Accessories available from StarTech.com

Contact your local StarTech.com dealer or visit www.startech.com for cables or other accessories that will help you get the best performance out of your new product.

ZENAUDLR1

Cable ZEN 3.3 ft (1m) RCA Audio Cable

ZENAUDLR2

Cable ZEN 6.6 ft (2m) RCA Audio Cable

ZENAUDLR3

Cable ZEN 9.8 ft (3m) RCA Audio Cable

ZENAUDLR4

Cable ZEN 13.1 ft (4m) RCA Audio Cable

ZENSVID1

Cable ZEN 3.3 ft (1m) S-Video Cable

ZENSVID2

Cable ZEN 6.6 ft (2m) S-Video Cable

ZENSVID3

Cable ZEN 9.8 ft (3m) S-Video Cable

ZENSVID4

Cable ZEN 13.1 ft (4m) S-Video Cable

ZENCOMP1

Cable ZEN 3.3 ft (1m) Composite Video Cable

ZENCOMP2

Cable ZEN 6.6 ft (2m) Composite Video Cable

ZENCOMP3

Cable ZEN 9.8 ft (3m) Composite Video Cable

ZENCOMP4

Cable ZEN 13.1 ft (4m) Composite Video Cable

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

Warranty Information

This product is backed by a one-year warranty. In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

About StarTech.com

StarTech.com is “The Professionals’ Source for Hard-to-Find Computer Parts”. Since 1985, we have been providing IT professionals with the quality products they need to complete their solutions. We offer an unmatched selection of computer parts, cables, server management solutions and A/V products and serve a worldwide market through our locations in the United States, Canada, the United Kingdom and Taiwan.

Visit **www.startech.com** for complete information about all our products and to access exclusive interactive tools such as the Parts Finder and the KVM Reference Guide. StarTech.com makes it easy to complete almost any IT solution. Find out for yourself why our products lead the industry in performance, support, and value.