


2 Port ISA RS232 Serial Adapter Card with 16550 UART

StarTech ID: ISA2S550

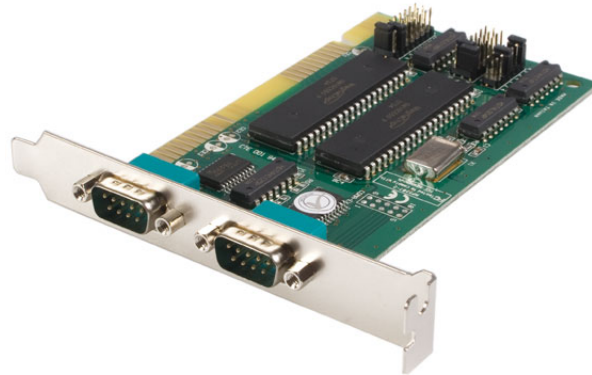

StarTech.com's ISA-based RS232 Serial Card (16550 UART) can be installed in an ISA motherboard slot to add two RS232 serial COM ports, with support for data transfer rates of up to 460.8Kbps for peak serial device performance.

The ISA Serial Adapter Card includes drivers for Windows® 3.1, 95, 98, NT4 and NT5, and offers a full built-in jumper set to ensure easy configuration and broad compatibility.

A cost-effective solution for connecting serial modems, POS devices, PDAs, digital cameras, printers, ISDN terminal adapters and more, to a system, the ISA serial card is backed by StarTech.com's Lifetime Warranty and free lifetime technical support.

Applications and Solutions

- **Casino** (video lottery terminals, slot machines)
- **Consumer** (modems, PDAs, digital cameras, printers)
- **Environmental Control** (lighting, temperature, clocks)
- **Healthcare** (patient monitoring equipment, nurses' stations, modems)
- **Hospitality/Restaurant** (credit card/debit card reader, serial printers)
- **Hotel Front Desk** (serial printers, bar code scanners, keyboard, mouse, receipt printer, credit/debit card reader)
- **ISDN Networking**
- **Manufacturing** (CNC machinery, process control equipment, bar code scanners, serial printers)

- **POS** (credit/debit card readers, receipt printers, bar code scanners, cash registers, scales)
- **Security** (UPS control, access key panels, video cameras, card readers, modems)

Features

- Includes drivers for Windows® 3.1, 95, 98, NT4, NT5
- Full jumper set to ensure compatibility with almost any PC system
- Supports the RS-232 interface

Technical Specifications

- Warranty: Lifetime warranty
- Bus Type: ISA
- Chipset ID: MosChip NM9820CV
- Connector Types: 2 - DB9 Male
- Maximum Data Transfer Rate: 460800 Kbits/Sec
- Number of Ports: 2
- Carton Quantity: 50
- Shipping (Package) Weight: 0.29 lb [0.13 kg]
- UARTS: 2 x 16C550
- COM Settings: COM1 to COM7
- IRQ Settings: 3,4,5,9,10,11,12,15 for each port
- Clock settings: x1 115.2 Kbits/sec., x2 230.4 Kbits/sec., x4 460.9 Kbits/sec.
- Compatible OS: DOS, Windows 95, 98, ME; Windows XP (32-bit, 64-bit), Windows Vista (32-bit, 64-bit); Linux

